




# Lifelong Worldwide Bowling

## Holding Pad Installation Guide

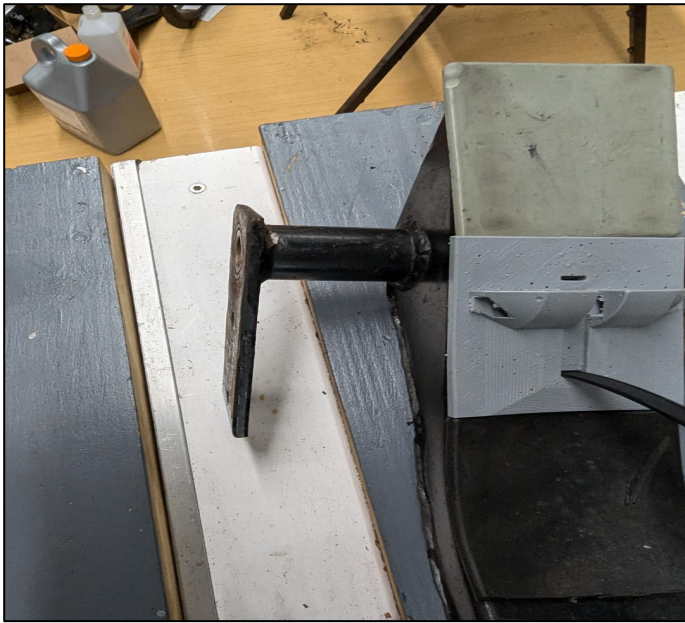

1) Replace the third pad up from the bottom which is the second one down from the top. The picture is shown with a wire tie going through the lower slit of the holding pad.

2) Insert the wire tie through the lower hole of the lift arm pad section and pull it all the way through so the insert tab of the wire tie is facing up as shown.



3) Rap the wire tie over the top of the lift arm tube as shown and zip it tight.

[www.bowlingproducts.com](http://www.bowlingproducts.com)  
[lifelong@bowlingproducts.com](mailto:lifelong@bowlingproducts.com)  
727-378-5884




# Lifelong Worldwide Bowling

## Holding Pad Installation Guide



5) Slide the holding pad all the way down the wire tie into place on the lift arm. Push the wire tie through the upper slit of the holding pad and through the hole of the lift arm. Secure the wire tie on the back side and pull it tight.

5) Slip another wire tie through the holding pad from side to side

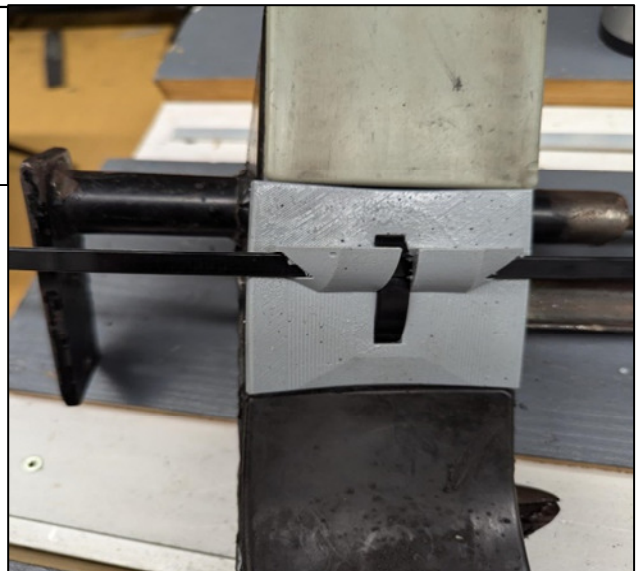

[www.bowlingproducts.com](http://www.bowlingproducts.com)  
[lifelong@bowlingproducts.com](mailto:lifelong@bowlingproducts.com)  
727-378-5884